


Specifications (continued)

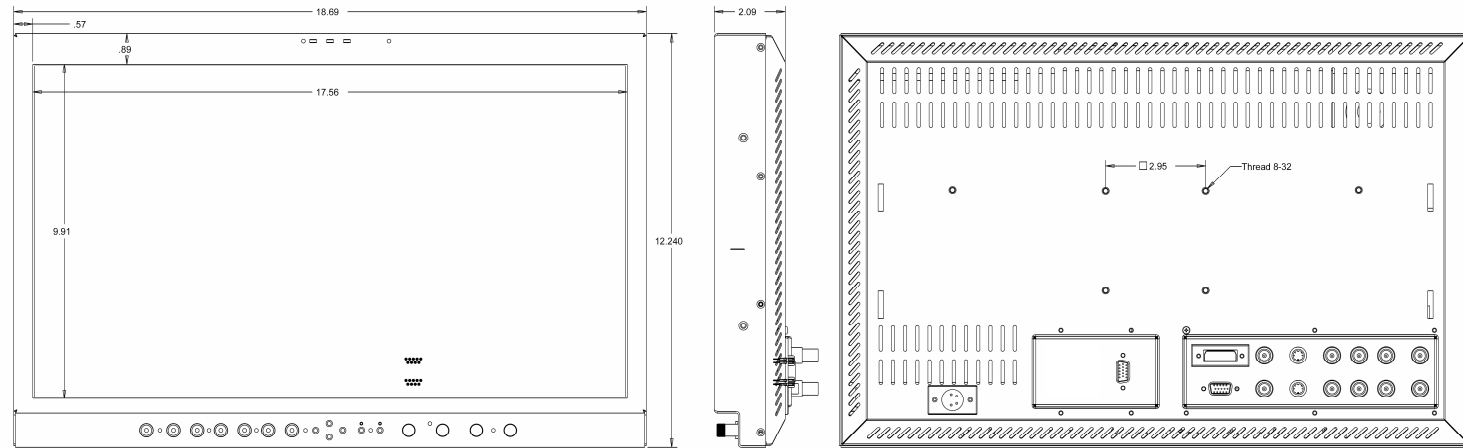

Maintenance

■ Screen Cleaning

Periodically clean the screen surface using ammonia-free cleaning wipes (Marshall Part No. **V-HWP-K**). A clean micro-fiber cloth can also be used using only non-abrasive and ammonia-free cleaning agents. Do not use paper towels. Paper towel fibers are coarse and may scratch the surface of the polycarbonate faceplate or leave streaks on the surface. Antistatic and fingerprint resistant cleaning agents are recommended. Do not apply excessive pressure to the screen to avoid damaging the LCD.

■ Faceplate Dusting

Dust the unit with a soft, damp cloth or chamois. Dry or abrasive cloths may cause electrostatic charge on the surface, attracting dust particles. Neutralize static electricity effects by using the recommended cleaning and polishing practice.

Warranty

Marshall Electronics warranties to the first consumer that this **V-R201P-AFHD** LCD monitor will, under normal use, be free from defects in workmanship and materials, when received in its original container, for a period of one year from the purchase date. This warranty is extended to the first consumer only, and proof of purchase is necessary to honor the warranty. If there is no proof of purchase provided with a warranty claim, Marshall Electronics reserves the right not to honor the warranty set forth above. Therefore, labor and parts may be charged to the consumer. This warranty does not apply to the product exterior or cosmetics. Misuse, abnormal handling, alterations or modifications in design or construction void this warranty. It is considered normal for a minimal amount of pixels, not to exceed three, to fail on the periphery of the display active viewing area. Marshall Electronics reserves the option to refuse service for display pixel failure if deemed unobtrusive to effective use of the monitor by our technicians. No sales personnel of the seller or any other person is authorized to make any warranties other than those described above, or to extend the duration of any warranties on behalf of Marshall Electronics, beyond the time period described above. Due to constant effort to improve products and product features, specifications may change without notice.

Marshall Electronics, Inc.

1910 East Maple Ave.
El Segundo, CA 90245


Tel: (800) 800-6608 / (310) 333-0606 • Fax: 310-333-0688

www.LCDRacks.com • sales@lcdracks.com

Marshall Electronics

V-R201P-AFHD

SD/HD Widescreen LCD Monitor

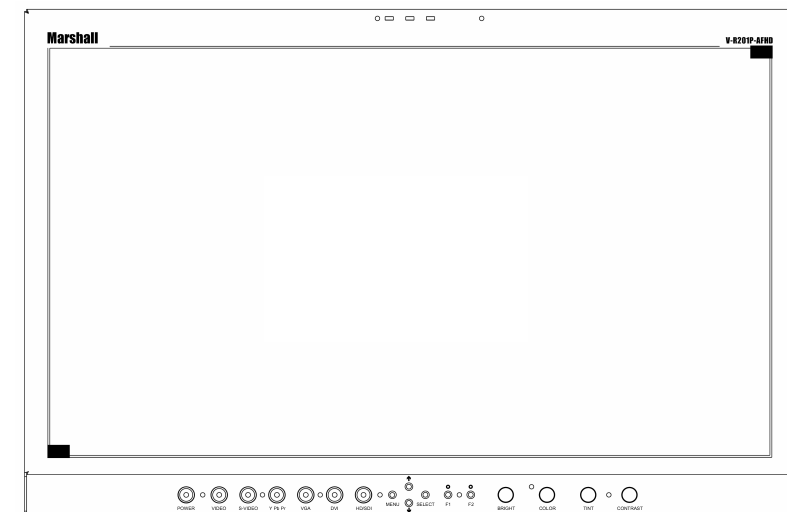

Operating Instructions

Contents

| | |
|---|-----------|
| Product Overview | 3 |
| Features | 3 |
| Installation and Initial Setup | 4 |
| Unpacking | 4 |
| Installation | 4 |
| Connections and Power-On..... | 4 |
| Front Panel Features | 5 |
| Power Button | 5 |
| Input Select Buttons..... | 5 |
| On-Screen Menu Navigation Buttons | 5 |
| User-Definable Function Buttons..... | 5 |
| Image Adjustment Knobs..... | 5 |
| Tally Lights..... | 5 |
| Rear Panel Features | 6 |
| Power Input..... | 6 |
| Signal Input/Output | 6 |
| Tally Interface | 6 |
| Mounting Holes | 6 |
| Compatible Input Formats | 7 |
| On-Screen Menu | 8 |
| STRUCTURE OVERVIEW | 8 |
| MAIN MENU AND NAVIGATION | 8 |
| MARKER SETUP SUBMENU | 9 |
| 16:9 Markers..... | 9 |
| 4:3 Markers..... | 10 |
| Marker Background | 10 |
| Center Marker..... | 10 |
| VIDEO CONFIGURATION SUBMENU | 11 |
| Color Temperature Presets | 11 |
| Adjusting Color Bias | 11 |
| Adjusting Color Gain..... | 11 |
| Monochrome Mode..... | 12 |
| Blue Only Mode | 12 |
| Pixel-to-Pixel Mode..... | 12 |
| Aspect Ratio Setting..... | 13 |
| Scanning Modes..... | 13 |
| Delay Modes..... | 13 |
| SYSTEM CONFIGURATION SUBMENU..... | 14 |
| Internal SMPTE Color Bars | 14 |
| User-Definable Function Buttons | 14 |
| Status Display..... | 14 |
| Saving and Loading User Configuration Presets | 14 |
| Specifications | 15 |
| Maintenance | 16 |
| Warranty | 16 |

Specifications

■ PANEL

| | |
|----------------------|------------------------------|
| Screen Size | 20.04" Diagonal |
| Display Area (h x v) | 443.609 x 249.408 mm |
| Aspect Ratio | 16:9 Native (4:3/16:9 Modes) |
| Pixels | 1366 x RGB x 768 |
| Color Depth | 24-bit (16,777,216 Colors) |
| Viewing Angle | 178° x 178° |
| Brightness | 430 cd/m ² |
| Contrast Ratio | 600:1 |
| Dot Pitch (h x v) | 0.108 x 0.324 mm |
| Pixel Pitch (h x v) | 0.324 x 0.324 mm |

■ VIDEO INPUT/OUTPUT

Video Input / Output

Supports SMPTE 170M, NTSC/PAL
Color sub-carrier required

S-Video (Y/C) Input / Output

Supports SMPTE 170M, NTSC/PAL

YPbPr Input / Output

Supports SMPTE 260M, 274M, 296M

HD-SDI Input / Output

Supports ITU-R BT.656, SMPTE 259M, 292M

VGA Input

Supports RGBHV, RsGsBs, RGSB, RGB CS,

DVI Input

Supports Digital Signals Only (DVI-D)
HDCP Supported

■ CONNECTORS

Video Input

| | |
|---------------|-------------------------|
| Video | 1 x BNC Female (75 Ω) |
| S-Video (Y/C) | 1 x 4-Pin Mini-DIN |
| YPbPr | 3 x BNC Female (75 Ω) |
| HD-SDI | 1 x BNC Female (75 Ω) |
| VGA | 1 x HD-15 Female |
| DVI | 1 x DVI-I 29-Pin Female |

Video Output (Active Loop-Through)

| | |
|---------------|-----------------------|
| Video | 1 x BNC Female (75 Ω) |
| S-Video (Y/C) | 1 x 4-Pin Mini-DIN |
| YPbPr | 3 x BNC Female (75 Ω) |
| SDI | 1 x BNC Female (75 Ω) |

Power Input

2-Pin Conxall Twist-Lock Female

Tally Interface

HD-15 Female

■ TALLY

3 LEDs (Green, Red, Yellow). Activation requires contact closure of pin to ground on the HD-15 connector:

| Pin No. | Signal |
|---------|--------|
| 1 | Green |
| 2 | Red |
| 3 | Yellow |
| 4 | Ground |
| 5 | Ground |
| 6 | N/C |
| 7 | N/C |
| 8 | N/C |
| 9 | N/C |
| 10 | N/C |
| 11 | N/C |
| 12 | N/C |
| 13 | N/C |
| 14 | Ground |
| 15 | Ground |

■ ELECTRICAL

| | |
|---------------------|-------------------|
| Power Consumption | 3A @ 24VDC (72 W) |
| Voltage Requirement | 24 VDC |

V-LCD23-P-01 Power Supply:

| | |
|--------|--------------------------|
| Input | 100V-240V, 2.5A, 50/60Hz |
| Output | 18-24VDC, 7.5A, 150W Max |

■ MECHANICAL

| | |
|-------------------------|---|
| Dimensions (w x h x d): | 18.69" x 12.240" x 2.09" |
| Rack Height: | 7 RU |
| Additional Mounting: | VESA 75 mm (Desktop Stand Available) |
| Weight (Monitor Only): | 12.54 lbs |
| Operating Temperature | 32°F to 120°F (0°C to 50°C) |
| Storage Temperature | -4°F to 120°F (-20°C to 50°C) |

| | |
|------------|--|
| Compliance | CE, FCC-Class A, ANSI-63.4 (Certificates on file) |
|------------|--|

| | |
|------|--|
| RoHs | Do not dispose. Return to Manufacturer or Authorized Recycle Facility. |
|------|--|

SYSTEM CONFIGURATION SUBMENU



Video Configuration Submenu

■ Internal SMPTE Color Bars

Use to display internally generated SMPTE split-field color bars.

■ User-Definable Function Buttons

Use the **FUNCTION 1** and **FUNCTION 2** menu items to define each function button on the front panel of the monitor. The following options are available for each button:

- DELAY Enable and rotate amongst delay modes.
- RATIO Toggle between 4:3 and 16:9 aspect ratios.
- BACK Rotate amongst marker backgrounds.
- CENTER Enable/disable center marker.
- MARKER Enable and rotate amongst marker settings (choices depend on aspect ratio setting).
- MONO Enable/disable monochrome mode.
- CTEMP Rotate amongst color temperature settings.
- PTP Enable/disable Pixel-to-Pixel mode.

FUNCTION 1 is set to **RATIO** by default.

FUNCTION 2 is set to **PTP** by default.

■ Status Display

Use to enable on-screen display of input/format status in the upper-left corner of the screen.

■ Saving and Loading User Configuration Presets

Use the SAVE CONFIG and LOAD CONFIG menus to save current settings to one of 6 presets, or load a preset. All monitor settings on the monitor are saved, including the image adjustment knob settings.

- Use the LOAD CONFIG menu to load one of presets USR1 – USR6. Factory default settings can also be loaded by selecting MFG. (Factory defaults cannot be overwritten.)
- Use the SAVE CONFIG menu to save the current settings to a preset from USR1- USR6.

Product Overview

The **V-R201P-AFHD** is a 20" widescreen high definition LCD monitor featuring our completely digital TFT-MegaPixel™ active matrix LCD platform. Available as a rack mount display or with a desktop stand, this monitor is an ideal lightweight replacement for CRTs used in all broadcast and professional video applications. When rack mounted the V-R201P-AFHD is ideal for video wall applications, occupying only 7 RU. Emulation of SMPTE-C/EBU color and adjustable color temperature enable the most precise color representation possible. Our proprietary digital signal processing features 10-bit A/D conversion of all analog signals, with 4X over-sampling and 5-line super-adaptive 2D comb filtering of composite signals. De-interlacing is performed using our HyperProcess™ algorithm with motion adaptive interpolation. Multi-format compatibility accommodates virtually all video formats including NTSC/PAL, 480i/p, 720p, and 1080i/p standards. VGA and DVI inputs accept VESA standards allowing the display to be used as a computer monitor. Advanced features include aspect ratio settings, a variety of screen markers, underscan mode, blue-only mode, monochrome mode, H/V delay, and Pixel-to-Pixel mode.

Features

■ High-Resolution 20" Panel

The V-R201P-AFHD features an all-digital TFT-MegaPixel™ active matrix LCD system with 3.15 million pixels. The LCD panel features a brightness of 430 cd/m², 600:1 contrast ratio, and a 178° all-around viewing angle making the display ideal in a variety of environments and lighting conditions.

■ Multi-Format Compatibility

With a variety of analog and digital inputs, the V-R201P-AFHD accommodates virtually all video formats. Input types include **Composite Video**, **S-Video**, **YPbPr**, **SDI**, **VGA**, and **DVI** with HDCP. Accepted formats include NTSC/PAL, 480i/p, 576i/p, 720p, 1035i, and 1080i/p standards, as well as VESA PC formats through SXGA (1280 x 1024).

■ End-to-End Digital Signal Processing

Analog signals are digitized using an advanced 10-bit process with 4x over-sampling, 5-line super-adaptive 2D comb filtering, and exacting color space conversion. Video is scaled to fit on the screen in the highest possible resolution using a state-of-the-art LSI that incorporates precision gamma correction and our HyperProcess™ motion adaptive interpolation for interlaced images.

■ ColorMatch™ Conversion with Color Temperature Adjustment

Emulation of SMPTE-C/EBU color space allows the V-R201P-AFHD to replace any broadcast CRT monitor. Settings include D55, D65 and D95. Bias and Gain adjustment for each color enables precise color matching and white balance.

■ Advanced Features

Aspect ratio settings, underscan mode, blue-only mode, monochrome mode, and H/V delay are a few of the advanced features making the V-R201P-AFHD at home in any broadcast environment. Pixel-to-Pixel mode also allows native display of any incoming image format.

■ Flexible Screen Markers

A variety of screen markers in both 4:3 and 16:9 modes allow accurate monitoring of the different aspect ratios used in broadcast environments.

■ User-Assigned Function Buttons

Two user-assignable function buttons on the front-panel allow quick access to numerous settings and features including aspect ratio, screen markers, monochrome mode, color temperature, delay mode, and more.

■ Unpacking

Carefully unpack the V-R201P-AFHD monitor and verify that the following items are included:

- V-R201P-AFHD Monitor
- Rack Adapter Bracket (Or Desktop Stand if ordered as V-201P-AFHD-DT)
- V-LCD23-P-01 Power Supply with 4-Pin XLR Connector
- Operating Instructions

Inspect the unit for any physical damage that may have occurred during shipping. Should there be any damage, immediately contact Marshall Electronics at (800) 800-6608. If you are not located within the continental United States, call +1 (310) 333-0606.

■ Installation

The V-R201P-AFHD monitor is shipped with a rack adapter bracket, allowing the monitor to be installed in an EIA standard 19-inch rack (occupying 7 RU). To rack mount the monitor, follow these steps:

- 1) Install the bracket in a rack using 4 screws, so the protruding hooks are pointing upwards. The rack adapter occupies 3RU. The monitor, when attached, will occupy 4 more rack units (2 above and 2 below the bracket, 7RU total).
- 2) Place the monitor against the rack adapter such that the etched line on either side of the monitor matches up with the line on each bracket ear. When these lines are matched, the hooks on the bracket will fit into the slots on the back of the monitor.
- 3) Let the monitor slide downwards approximately 1 cm so the hooks are holding the monitor. Check both sides to make sure they are level, ensuring that both hooks have properly secured the monitor.
- 3) On the back of the bracket, screw in and tighten the two thumbscrews. If either screw does not tighten, check to make sure that the monitor is correctly attached to the bracket.

Alternately, the V-R201P-AFHD can be configured as a desktop monitor with an optional table top stand (Marshall Part No. **VP-0172-SF-A**).

A VESA standard 75mm hole pattern also allows custom mounting installations.

■ Connections and Power-On

Plug the V-LCD23-P-01 power supply into an AC power source (100-240 V @ 50/60 Hz). Attach the 4-pin XLR connector to the back of the monitor. Please note that 24VDC can be also supplied directly to the monitor from a variety of sources. The monitor will draw approximately 3 Amps at 24 Volts in operation.

Connect the required cables for video signal input and output. (Power must be applied to the V-R201P-AFHD for the active loop-through outputs to be activated.) All BNC connectors are rated at 75Ω.

Turn on the unit by pressing the power button located on the front panel. Select a video input by pressing the corresponding input select button.


VIDEO CONFIGURATION SUBMENU (continued)

■ Aspect Ratio Settings

Use to switch between 4:3 and 16:9 aspect ratios.

As the V-R201P-AFHD monitor has a native resolution of 1366 x 768 RGB pixels, incoming images are automatically scaled to fit the screen:

- In 16:9 mode, images are scaled up or down to fill the entire 16:9 screen (1366 x 768).
- In 4:3 mode, images are scaled to fill the maximum 4:3 portion of the screen (1024 x 768), with black bars filling the remainder of the screen.

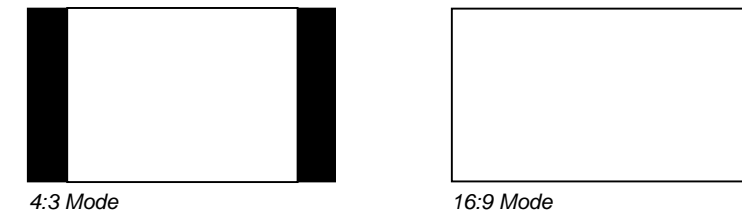

Note: The aspect ratio setting is ignored when Pixel-to-Pixel mode is enabled.

■ Scanning Modes

Use this setting to switch between normal and underscan modes:

- In normal scan mode, the active portion of the video signal is displayed on the screen, with 0% overscan.
- In underscan mode, area around the active video area is displayed on the screen, resulting in blanking intervals being shown around the perimeter of the active image. Use this mode to clearly view the edges of the active video area.

■ Delay Modes

Use this setting to enable one of three delay modes (H/V, H, V):

- In H/V delay mode, both horizontal sync and vertical sync are delayed, resulting in both horizontal and vertical blanking periods being shown on the screen.
- In V delay mode, vertical sync is delayed so that the vertical blanking period is displayed on screen.
- In H delay mode, horizontal sync is delayed so that the horizontal blanking period is displayed on the screen.

Note: Delay modes are only available in normal scan mode.

On-Screen Menu (continued)

VIDEO CONFIGURATION SUBMENU (continued)

■ Monochrome Mode

Use this setting to enable monochrome mode. Only the luminance of the image will be displayed as a grayscale picture.

■ Blue-Only Mode

Use this setting to enable Blue-Only mode. This mode displays only the blue color component of the image, switching off the red and green components. Use this mode when calibrating the monitor to SMPTE color bars with the following procedure:

1. Allow the monitor to warm up for at least 5-10 minutes.
2. Display SMPTE split-field color bars on the monitor using the internal generator or an external source.
3. Enable **Monochrome mode**.
4. Locate the pluge pattern (super black, black, and gray bars) at the lower-right corner of the screen. Adjust the **Brightness** knob until there is no visible difference between the super black and black bars, but the gray bar is still visible.
5. Adjust the **Contrast** knob until an even grayscale appears along the top bars.
6. Disable **Monochrome mode**.
7. Enable **Blue-Only mode** and adjust the **Color** knob so that the outermost bars (white and blue) appear to match in brightness.
8. Composite/S-Video NTSC only: Adjust the **Tint** knob until the third bar from the left (cyan) and the third bar from the right (magenta) appear to match in brightness.
9. Disable **Blue-Only mode**.

■ Pixel-to-Pixel Mode



Use this setting to enable Pixel-to-Pixel mode.

This mode bypasses the monitor's internal scaling function and displays incoming images in their native resolution and aspect ratio, with a one-to-one mapping:

- For incoming formats smaller than the native resolution of the LCD panel (1366 x 768), the image will be displayed in the center of the screen using only the necessary LCD pixels. For example, NTSC or PAL images will occupy exactly 720 x 486 or 720 x 576 pixels respectively. The surrounding pixels will be black.
- For incoming formats exceeding 1366 x 768 pixels, only the center 1366 x 768 of the incoming image will be displayed occupying the whole screen, with the remainder of the picture cropped. For example, 1080i/p formats will both be cropped to 1366 x 768 and displayed full-screen.

Note: Pixel-to-Pixel mode will utilize the entire screen (1366 x 768) regardless of the aspect ratio setting. Pixel-to-Pixel mode is not available when using the VGA or DVI inputs.

Front Panel Features

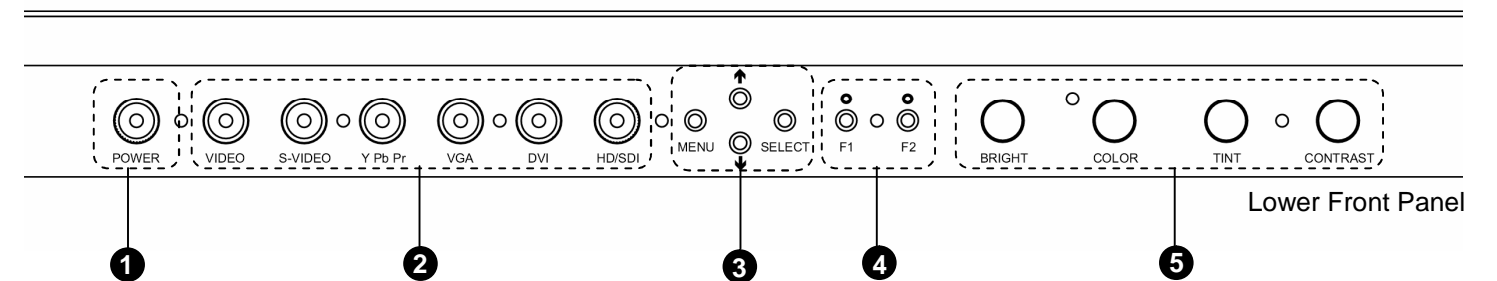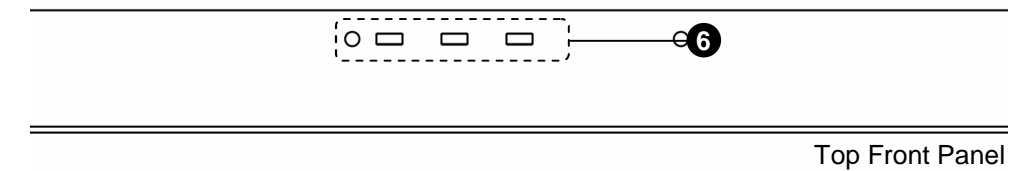

❶ Power Button

Turn the monitor on by pressing the power button. In the OFF state, the LED will shine brightly. The LED will dim when the monitor is turned on.

❷ Input Select Buttons

Use the input select buttons to select the input to be displayed:

- Video
- S-Video
- YPbPr (SD/HD)
- VGA
- DVI
- SDI (SD/HD)

Each input automatically detects the applicable formats (See **Compatible Input Formats – Page 7**).

❸ On-Screen Menu Navigation Buttons

Use the **Menu**, **↑**, **↓**, and **Select** buttons to display and navigate the on-screen menu (See **Main Menu and Navigation – Page 8**).

❹ User-Definable Function Buttons

Two user-definable function buttons can be used for direct access to various settings. Functions are assigned using the on-screen menu (See **User-Definable Function Buttons – Page 14**).


❺ Image Adjustment Knobs

Use the image adjustment knobs to adjust the following settings. Pressing each knob will display the current status of the corresponding control:

- Brightness (0-64)
- Color (0-64)
- Tint (0-64) [NTSC Only]
- Contrast (0-64)

❻ Tally Lights

Three tally LEDs (green, red, and yellow) are provided as general purpose indicators. Each LED can be individually controlled, providing multiple indications. Tally LEDs are controlled via the HD-15 connector on the rear panel (See **Tally Interface – Page 6**).

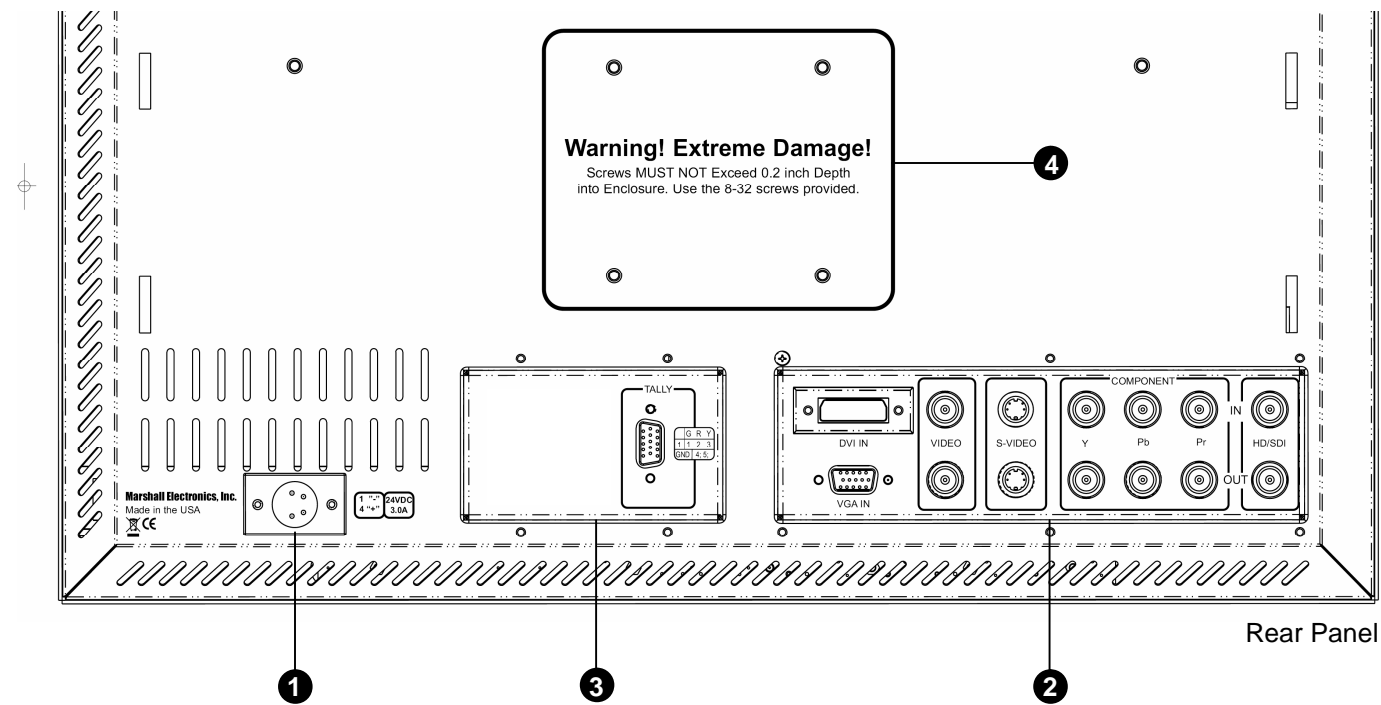

1 Power Input

Connect the 24VDC input to the 4-Pin XLR power input connector. Power can be supplied from the included power supply, or from a variety of DC sources supplying at least 3 Amps at 24 Volts.

IMPORTANT: If using a power source other than the included power supply, be sure that the polarity of the DC input is correct:

- Pin 1: GND
- Pin 2: N/C
- Pin 3: N/C
- Pin 4: +24VDC

2 Signal Input/Output

Connections:

- Composite Video Input/Output (BNC)
- S-Video Input/Output (4-Pin Mini-DIN)
- YP_BP_R Input/Output (BNC x 3)
- SDI Input/Output (BNC)
- VGA (HD-15)
- DVI (29-Pin connector, DVI-D signals only)

All outputs are active and require the monitor to be powered.

3 Tally

Each tally light is activated via the HD-15 connector by connecting the corresponding pin to ground. A variety of external devices can be used to perform the contact closure. No additional power should be supplied to the HD-15 port.

Tally Interface: HD-15 Pinout

| Pin No. | Signal |
|---------|--------|
| 1 | Green |
| 2 | Red |
| 3 | Yellow |
| 4 | Ground |
| 5 | Ground |
| 6 | N/C |
| 7 | N/C |
| 8 | N/C |
| 9 | N/C |
| 10 | N/C |
| 11 | N/C |
| 12 | N/C |
| 13 | N/C |
| 14 | Ground |
| 15 | Ground |

4 Mounting Holes

A VESA-standard 75 mm hole pattern is provided to accommodate a variety of custom mounting options.

VIDEO CONFIGURATION SUBMENU



Video Configuration Submenu

Color Temperature Presets

Use this setting to choose one of three color temperature presets:

- D55 (5500K)
- D65 (6500K)
- D93 (9300K)
- USER (Adjustable Color Bias and Gain)

Adjusting Color Bias



Color Bias Menu

Use this submenu to adjust bias of the color response. Adjust the bias for each color to alter the white balance of the image. The Color Temperature preset will automatically switch to USER when Color Bias settings are adjusted. It is normal for color bias adjustments to be very subtle.

Adjusting Color Gain



Color Gain Menu

Use this submenu to adjust gain of the color response. The Color Temperature preset will automatically switch to USER when Color Gain settings are adjusted.


MARKER SETUP SUBMENU (continued)

■ 4:3 Markers

Use this setting to superimpose one of 5 markers on the screen when in 4:3 mode. This setting is disabled when the aspect ratio is set to 16:9, or when Pixel-to-Pixel, Underscan, or H/V Delay is enabled.

- OFF (No Marker)
- 95% Safe Area
- 93% Safe Area
- 90% Safe Area
- 88% Safe Area
- 80% Safe Area

4:3 Marker Examples:

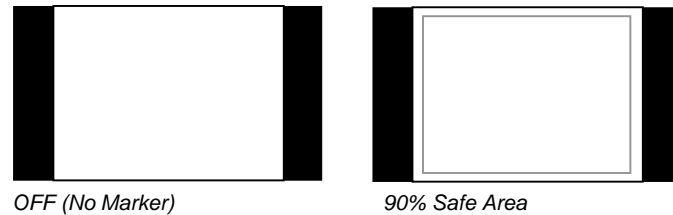


■ Marker Background

Use this setting to choose how selected markers are displayed on the screen:

- OFF The marker is superimposed on the complete image.
- Half-tone Image area beyond the marker is shown at 50% intensity.
- Black Image area beyond the marker is shown at 0% intensity (black).

Example (80% Marker in 4:3 Mode):

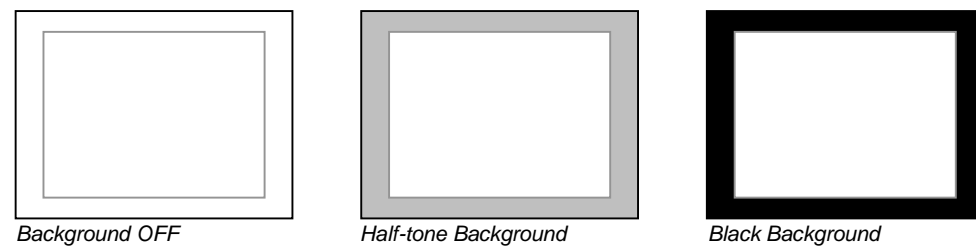

■ Center Marker

Use this setting to display a center marker on the screen. This feature is not available when H/V delay is on.



Compatible Input Formats

| Format | Composite | S-Video | YPbPr | SDI | VGA | DVI-D |
|-------------------|-----------|---------|-------|-----|-----|-------|
| NTSC | • | • | | | | |
| PAL | • | • | | | | |
| 480i / 59.94 | | | • | • | • | |
| 576i / 50 | | | • | • | • | |
| 485p / 59.94 | | | • | | | |
| 576p / 50 | | | • | | | • |
| 1035i / 60 | | | | • | | |
| 1035i / 59.94 | | | | • | | |
| 1080i / 60 | | | • | • | • | • |
| 1080i / 59.95 | | | • | • | • | • |
| 1080i / 50 | | | • | • | • | • |
| 1080psF / 24 | | | • | • | • | • |
| 1080psF / 23.98 | | | • | • | • | • |
| 1080p / 30 | | | • | • | | |
| 1080p / 29.97 | | | • | • | | |
| 1080p / 25 | | | • | • | | |
| 720p / 60 | | | • | • | • | • |
| 720p / 59.94 | | | • | • | • | • |
| 720p / 50 | | | • | • | • | • |
| 720p / 30 | | | • | • | | |
| 720p / 29.97 | | | • | • | | |
| 720p / 25 | | | • | • | | |
| 640 x 480 @ 60Hz | | | | | • | • |
| 640 x 480 @ 75Hz | | | | | • | • |
| 640 x 480 @ 85Hz | | | | | • | • |
| 800 x 600 @ 60Hz | | | | | • | • |
| 800 x 600 @ 75Hz | | | | | • | • |
| 800 x 600 @ 85Hz | | | | | • | • |
| 1024 x 768 @ 60Hz | | | | | • | • |
| 1024 x 768 @ 75Hz | | | | | • | • |
| 1024 x 768 @ 85Hz | | | | | • | • |
| 1280 x 768 @ 60Hz | | | | | • | • |

STRUCTURE OVERVIEW

| | | | |
|----------------|------------------------------------|---|---|
| MAIN | MARKER SETUP | MARKER 16:9 | OFF, 13:9, 14:9, 4:3, 2.35:1, 1.85:1, 95%, 93%, 90%, 88%, 80% |
| | | MARKER 4:3 | OFF, 95%, 93%, 90%, 88%, 80% |
| | | MARKER BACKGROUND | OFF, HALF, BLACK |
| | | CENTER MARKER | OFF, ON |
| | VIDEO CONFIG | COLOR TEMP | D55, D65, D93, USER |
| | | ADJ COLOR BIAS | RED (0-100) |
| | | | GREEN (0-100) |
| | | | BLUE (0-100) |
| | | ADJ COLOR GAIN | RED (0-100) |
| | | | GREEN (0-100) |
| | | | BLUE (0-100) |
| | | MONO | OFF, ON |
| | | BLUE ONLY | OFF, ON |
| | PIXEL TO PIXEL | OFF, ON | |
| | ASPECT RATIO | 4:3, 16:9 | |
| | SCAN | NORMAL, UNDER | |
| | DELAY | OFF, H/V, V, H | |
| | SYSTEM CONFIG | SMPTE BAR | OFF, ON |
| | | FUNCTION 1 | DELAY, RATIO, BACK, CENTER, MARKER, MONO, CTEMP, PTP |
| | | FUNCTION 2 | DELAY, RATIO, BACK, CENTER, MARKER, MONO, CTEMP, PTP |
| STATUS DISPLAY | | OFF, ON | |
| LOAD CONFIG | | USR1, USR2, USR3, USR4, USR5, USR6, MFG | |
| SAVE CONFIG | USR1, USR2, USR3, USR4, USR5, USR6 | | |

MAIN MENU AND NAVIGATION


Access the main menu by pushing and holding the **MENU** button on the front panel of the monitor until the main menu appears (approximately 1-2 seconds).



Main Menu

- Step through menu items using the ↑ and ↓ buttons.
- Choose a menu item by pressing **SELECT**.
- Rotate through options using the ↑ and ↓ buttons.
- Choose a setting by pressing **SELECT**.
- Return to the previous menu by pressing **MENU**.
- Exit the main menu by pressing **MENU**. The menu will automatically time out after 5 seconds. After exiting the menu, wait 1-2 seconds before displaying the menu again.

MARKER SETUP SUBMENU

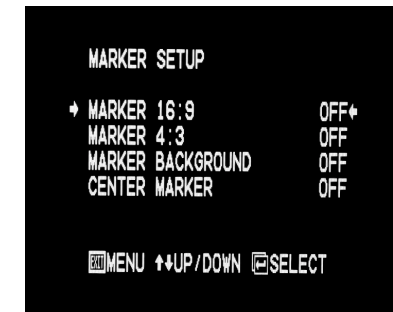


Marker Setup Submenu

16:9 Markers


Use this setting to superimpose one of 10 markers on the screen when in 16:9 mode. This setting is disabled when the aspect ratio is set to 4:3, or when Pixel-to-Pixel, Underscan, or H/V Delay is enabled.

- OFF (No Marker)
- 13:9 Aspect Ratio
- 14:9 Aspect Ratio
- 4:3 Aspect Ratio
- 2.35:1 Aspect Ratio
- 1.85:1 Aspect Ratio
- 95% Safe Area
- 93% Safe Area
- 90% Safe Area
- 88% Safe Area
- 80% Safe Area


16:9 Marker Examples:




OFF (No Marker)



90% Safe Area



2.35:1 Aspect Ratio

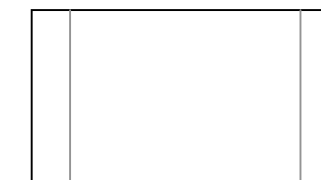

4:3 Aspect Ratio Marker